


## XBA-PLN5 Option Switch Settings

Supported bill PLN 10, 20, 50, 100, 200 5bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject PLN 10	ON							
★ Accept PLN 10	OFF							
★ Reject PLN 20		ON						
★ Accept PLN 20		OFF						
★ Reject PLN 50			ON					
★ Accept PLN 50			OFF					
★ Reject PLN 100				ON				
★ Accept PLN 100				OFF				
★ Reject PLN 200					ON			
★ Accept PLN 200					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

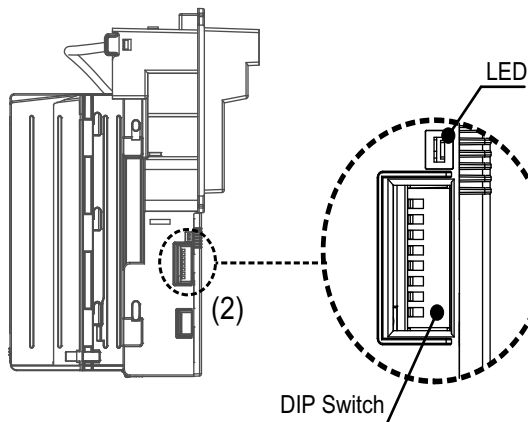


### Currency Assign Data

Interface Bill value	ICT104U	Parallel A3	ICT104V	Pulse	MDB
BV1	PLN 10	PLN 10	PLN 10	PLN 10	PLN 10
BV2	PLN 20	PLN 20	PLN 20	PLN 20	PLN 20
BV3	PLN 50	PLN 50	PLN 50	PLN 50	PLN 50
BV4	PLN 100	PLN 100	PLN 100	PLN 100	PLN 100
BV5	PLN 200		PLN 200	PLN 200	PLN 200

## XBA-PLN5 (Pulse/MDB/ICT/Parallel A3)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
★ Credit-Pulse Normal HIGH					ON			
★ Credit-Pulse Normal LOW					OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
<b>Pulse Mode</b>						<b>Other Mode</b>		
★ 1 pulse / PLN 10	MDB Mode					OFF	OFF	
5 pulse / PLN 10	Parallel A3 Mode					OFF	ON	
10 pulse / PLN 10	ICT104U Mode					ON	OFF	
25 pulse / PLN 10	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

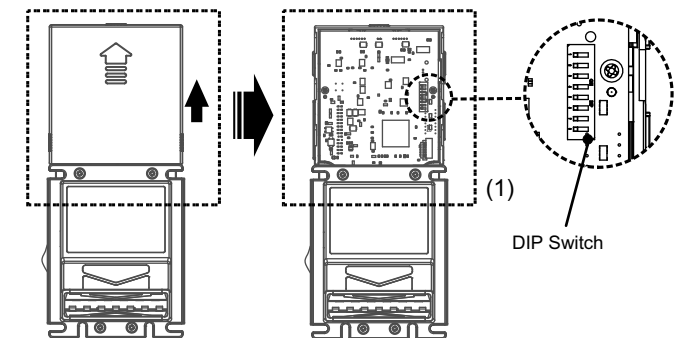

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.  
2. calibrate card.